

HunterDouglas

PALM BEACH™

Polysatin Shutters

French Door Worksheet Round Style Door Knobs

Sidemark

Line Number

Page Number


1. Determine L-frame detail and hinge configuration.

If "A" is less than 3/4"
enter 3-sided frame



OR

If "A" is 3/4" or more
enter either a 3-sided
or 4-sided frame



Frame Detail:

3-sided

4-sided

Hinge Detail:

Hinge Left

Hinge Right

2. Determine ordered width for 3 or 4-sided frames.

$$\begin{array}{c} \text{B} \end{array} + \begin{array}{c} \text{MAX. } 1\frac{1}{2}\text{"} \\ \text{A} \end{array} + 1\frac{1}{2}\text{"} = \begin{array}{c} \text{Ordered Width} \end{array}$$

(Recommended overlap plus reveal)

3. Determine the ordered height.


$$\begin{array}{c} \text{C} \end{array} + 3\text{"} = \begin{array}{c} \text{Ordered Height} \end{array}$$

(Frame Overlap)

4. Determine divider rail location.

$$\begin{array}{c} \text{D} \end{array} + 1\frac{1}{2}\text{"} = \begin{array}{c} \text{Divider Rail} \\ \text{Location} \end{array}$$

(Frame Overlap on Bottom)

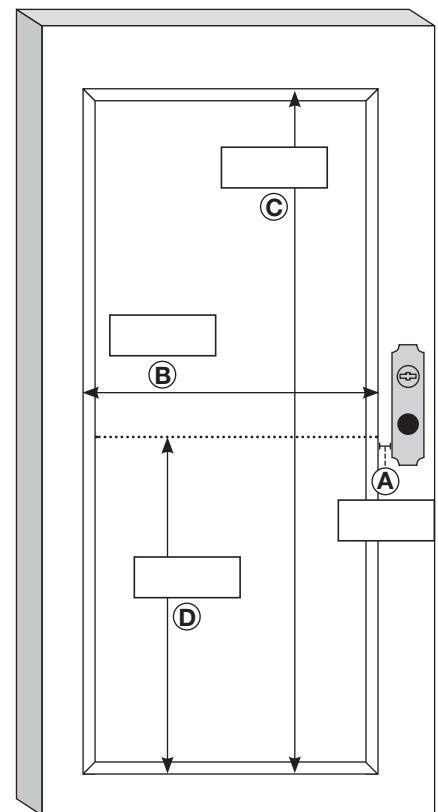

Round Style Knob

Ordering Notes

1. Transfer final dimensions to your shutter order form.
2. Attach a copy of this worksheet to the order form.
3. Check for louver clearance & order buildout if needed.
4. Split tilt bars are optional in lieu of divider rails.
5. Frame overlap = 1 1/2" per side including reveal.

Worksheet Key

- A = Distance between the handle baseplate to glass/molding.
 B = Outside glass/molding measurement width.
 C = Outside glass/molding measurement height.
 D = Outside glass/molding measurement to desired divider rail location.