

BILL TO:	Date:	SHIP VIA:	Page of
	Account #:	<input type="checkbox"/> Will Call	Job #:
	P.O. #:	<input type="checkbox"/> Delivery Service	
SHIP TO:	Ordered by:	<input type="checkbox"/> Ship	
	Sidemark:		
	Phone #:	Fax #:	

# HunterDouglas

## PALM BEACH™

Polysatin Shutters

Opening #	Room	Qty.	Color ①	Hinge Color ②	Louver Size ③	IM or OM ④	Frame Type ⑤	Ordered Size ⑦		# of Panels Per Opening ⑧	Panel Configuration ⑨	Frame Detail ⑩	Buildout ⑪	Tilt Bar ⑫	Track Balance Type ⑬	Divider Rail Height (Double-Hung and Café Height) ⑭	T-Post ⑮				Closure System ⑯	Astragal ⑰	Rail Size ⑱	Ext. Pole ⑲
								Width	Height								1st	2nd	3rd	4th				
																DR2	1st	2nd	3rd	4th				
																DR1								
																DR2	1st	2nd	3rd	4th				
																DR1								
																DR2	1st	2nd	3rd	4th				
																DR1								
																DR2	1st	2nd	3rd	4th				
																DR1								

NOTES: IM (Inside Mount) = Factory takes deductions. OM (Outside Mount) = Finished shutter size. See order form key or Reference Guide for more details.

Everything below this dashed line is actual window opening dimensions and information. Above this dashed line is the order specification. Fabricators are only responsible for the information provided above this dashed line.

OPENING # \_\_\_\_\_ CLEARANCE DEPTH \_\_\_\_\_ TRIM TO TRIM

SILL DETAIL WINDOW DIAGONAL

A. Width \_\_\_\_\_ B. Height \_\_\_\_\_ C. Projection \_\_\_\_\_ D. \_\_\_\_\_ E. \_\_\_\_\_

← W


← W

← W                      H                      H                      H

↓                                      ↓                                      ↓

NOTES: ⑥ Rough Measure \_\_\_\_\_ X \_\_\_\_\_  
Number of Panels \_\_\_\_\_

SILL DETAIL AND WINDOW DIAGONAL MEASUREMENTS ARE DESCRIBED BELOW.

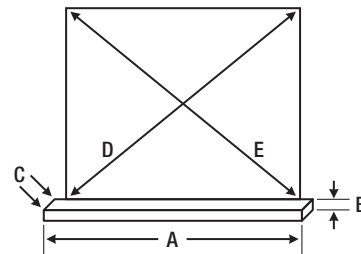

MEASURED BY (installer signature required)

INSTALLER CERTIFICATION NUMBER

CUSTOMER SIGNATURE (for verification)

DEALER SIGNATURE

DATE

OPENING # \_\_\_\_\_ CLEARANCE DEPTH \_\_\_\_\_ TRIM TO TRIM

SILL DETAIL WINDOW DIAGONAL

A. Width \_\_\_\_\_ B. Height \_\_\_\_\_ C. Projection \_\_\_\_\_ D. \_\_\_\_\_ E. \_\_\_\_\_

← W

← W

← W                      H                      H                      H

↓                                      ↓                                      ↓

NOTES: ⑥ Rough Measure \_\_\_\_\_ X \_\_\_\_\_  
Number of Panels \_\_\_\_\_

OPENING # \_\_\_\_\_ CLEARANCE DEPTH \_\_\_\_\_ TRIM TO TRIM

SILL DETAIL WINDOW DIAGONAL

A. Width \_\_\_\_\_ B. Height \_\_\_\_\_ C. Projection \_\_\_\_\_ D. \_\_\_\_\_ E. \_\_\_\_\_

← W

← W

← W                      H                      H                      H

↓                                      ↓                                      ↓

NOTES: ⑥ Rough Measure \_\_\_\_\_ X \_\_\_\_\_  
Number of Panels \_\_\_\_\_

# Palm Beach™ Polysatin Shutters

## Order Form Key

Use the following key as a guide when completing the Palm Beach polysatin shutters order form.

**Note:** Items marked with an asterisk (\*) require a surcharge.

### 1 Color

Specify color number.

051 = White Silk                      136 = Bright White  
137 = White                            138 = Linen

### 2 Hinge Color

Specify hinge color number. The standard hinge colors are standard are shown in parenthesis.

Lift Off Hinges with removable pin:

006 = Brass Finish                      007 = Antique Brass Finish  
008 = Brushed Nickel Finish        011 = Stainless Steel\*  
051 = White Silk (051 White Silk)    136 = Bright White (136 Bright White)  
137 = White (137 White)                138 = Linen (138 Linen)

Extended Leaf Hinge: Add -E. (Available in all colors.)

### 3 Louver Size

Specify louver size: 2 1/2", 3 1/2" or 4 1/2"

### 4 IM or OM

Specify inside mount or outside mount.

**IM** = Inside Mount

Factory takes a standard framed deduction of 1/4" from width and height or a standard without frame deduction of 3/16" from width and height.

On all inside mounts, diagonal measurements must be taken. If diagonal measurements are not equal, consider making greater deductions than the standard 1/4" (framed) or 3/16" (without frame). If the diagonal measurement difference is greater than 1/2", we recommend an outside mount for that particular window opening.

**OM** = Outside Mount

Factory takes no deductions. Submitted size will be the finished shutter size.

When measuring the opening of a typical window for outside mounts, we recommend adding the width of the base of the frame plus 1/4", per framed side, to the largest width and height measurements.

This provides a 1/4" reveal around the entire window opening.

Standard additions:

Frame Type	3-Sided Frame		4-Sided Frame	
	Width	Height	Width	Height
S21, L21	3 1/8"	1 9/16"	3 1/8"	3 1/8"
C21	5 7/8"	2 15/16"	5 7/8"	5 7/8"
BP, BF	4 1/2"	2 1/4"	4 1/2"	4 1/2"

### 5 Frame Type (I) = Inside Mount, (O) = Outside Mount

The following types are priced as framed:

Z21 = Standard Z-frame (I)                      Z22 = Decorative Z-frame (I)  
Z23 = Colonial Z-frame (I)                      S22 = Decorative Z Sill (I or O)  
L21 = Standard L-frame (I or O)                C21 = Deluxe Casing frame (O)  
S21 = Deluxe Casing Sill (I or O)

Rubber Flex Option: Add -RF to frame options to specify Rubber Flex (Available on Z21, Z23 and L21 if inside mount)

Cover Strip Option: Add -CS to frame options to specify Cover Strip (Available on L21 and C21)

Example: For L21 with rubber flex and cover strip order L21-RFCS

BP = Bypass track system\*                      BF = Bi-fold track system\*

BPBF = Bypass bottom floor guide\*

BPBP = Bypass bottom panel guide\*

BFB = Bi-fold track system with bottom track\*

(Factory takes 7/16" deduction for bottom track)

BO = Bypass Open\*                                BPUL = Bypass U/L Guide\*

FDC = French door cut-out\*

FDCWC = French door companion without cut-out

Available frame combinations: Z21/L21, Z23/L21, Z22/S22, and C21/S21. Must specify frame type and location in diagram.

The following types are priced as unframed:

HSS = Hang strip side-by-side                HSB = Hang strip behind

WF = Without frame

WFBP = Bypass track system without frame\*

WFBF = Bi-fold track system without frame\*

WFBPB = Bypass track system without frame, with bottom track\*

WFBFB = Bi-fold track system without frame, with bottom track\*

### 6 Rough Measure

Enter rough measurements and number of panels. This will be used as a guide for price estimates and configurations until a final measure is performed by a trained installer.

### 7 Ordered Size

Enter width and height dimensions to the nearest 1/16".


**Note:** Splices will occur on frames and valances over 180".

### 8 Number of Panels Per Opening

1 = one panel    2 = two panels    3 = three panels etc.

### 9 Panel Configuration

Print the letters of the panel configuration. Examples:

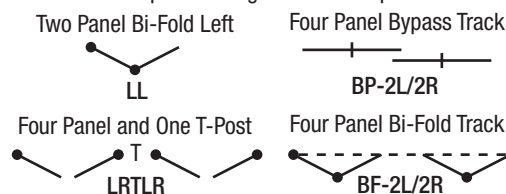

Then, in the appropriate opening box, draw the panel configuration. Include the letters of the configuration.

**Note:** For windows requiring unequal panel widths, see reference guide for details.

### 10 Frame Detail

2 = 2-sided; 3 = 3-sided (top, left, right); 4 = 4-sided

4SIL = 4-sided with bottom sill    2CAF = 2-sided Café style (left, right)

3CAF = 3-sided Café style (left, right, bottom)

4CAF = 4-sided Café style, panels part way up\*

3CSIL = 3-sided Café style with bottom sill

4CSIL = 4-sided Café style with bottom sill, panels part way up\*

DH = Double-hung\* (specify 2, 3 or 4-sided: 2DH, 3DH or 4DH)

DHHT = Double-hung with horizontal T-post\* (specify 2, 3 or 4-sided: 2DHHT, 3DHHT or 4DHHT)

3D = 3-sided door which provides 5/8" floor clearance

SA = Special applications other than those listed above. Additional notes required.

**Note:** Indicate height for Café and Double-hung styles in column 14.

### 11 Build-Out

1 = Single build-out (standard frames: 1/2", track systems: 3/4")

2 = Double build-out (standard frames: 1", track systems: 1 1/2")

Other Hang Strip/Light Stop Options:

LS21 = 1/4"    LS22 = 1/2"    HS21 = 3/4"    HS22 = 1"

### 12 Tilt Bar

F = Front center

L = Lantana™ gear system

FH = Front hinge side

RH = Rear hinge side†

SP = Split tilt (Enter height of split)    \*Note: 3/4" clearance required for TruView™ rear tilt.

### 13 Valance Type (Track Systems Only)

S = Standard valance (Bi-fold only)    D = Deluxe valance

### 14 Divider Rail/Café/Double-Hung Height

DR1 = First divider rail (required for panel heights over 60")

DR2 = Second divider rail (required for panel heights over 90")

**Note:** Enter "C" if the desired location is at the center of the panel.

### 15 T-Post

EQ = T-post placed to provide equally divided openings

For uneven placement, always start from the left, indicate distance in inches from left side of shutter to center of each T-post.

### 16 Closure System

D = Duracatch™    M = Magnets    N = None

All 4-sided standard units come with Duracatch panel lock system.

### 17 Astragal

S = Standard    SA = Special Application

**Note:** In the appropriate opening box draw an Astragal symbol on the panel configuration from box 9. †

**Note:** Single units come standard with flex light block. Multiple panels come standard with rear astragal and flex light block.

### 18 Rail Size

2 = 2" top and bottom rail    4 = 4" top and bottom rail

**Note:** Default rail size on panels under 36" is a 2" rail.

### 19 Extension Pole\* (Retractable 53"- 96")

Specify quantity: 1, 2, etc.

### Lineal Materials

Grid prices include standard frames, T-posts, buildout and hardware. To order additional lineal materials, indicate quantity, color and length.